
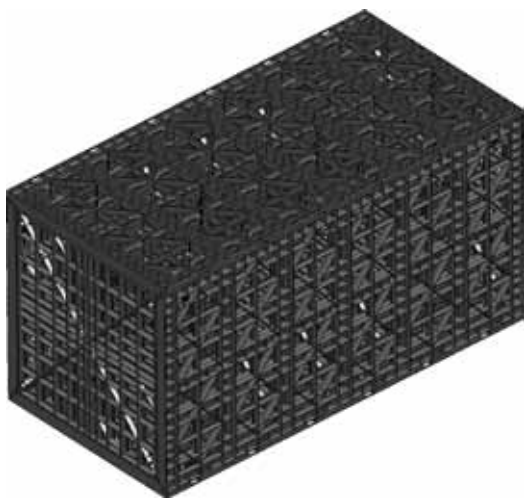


VersiTank[®] 844

Stormwater Management

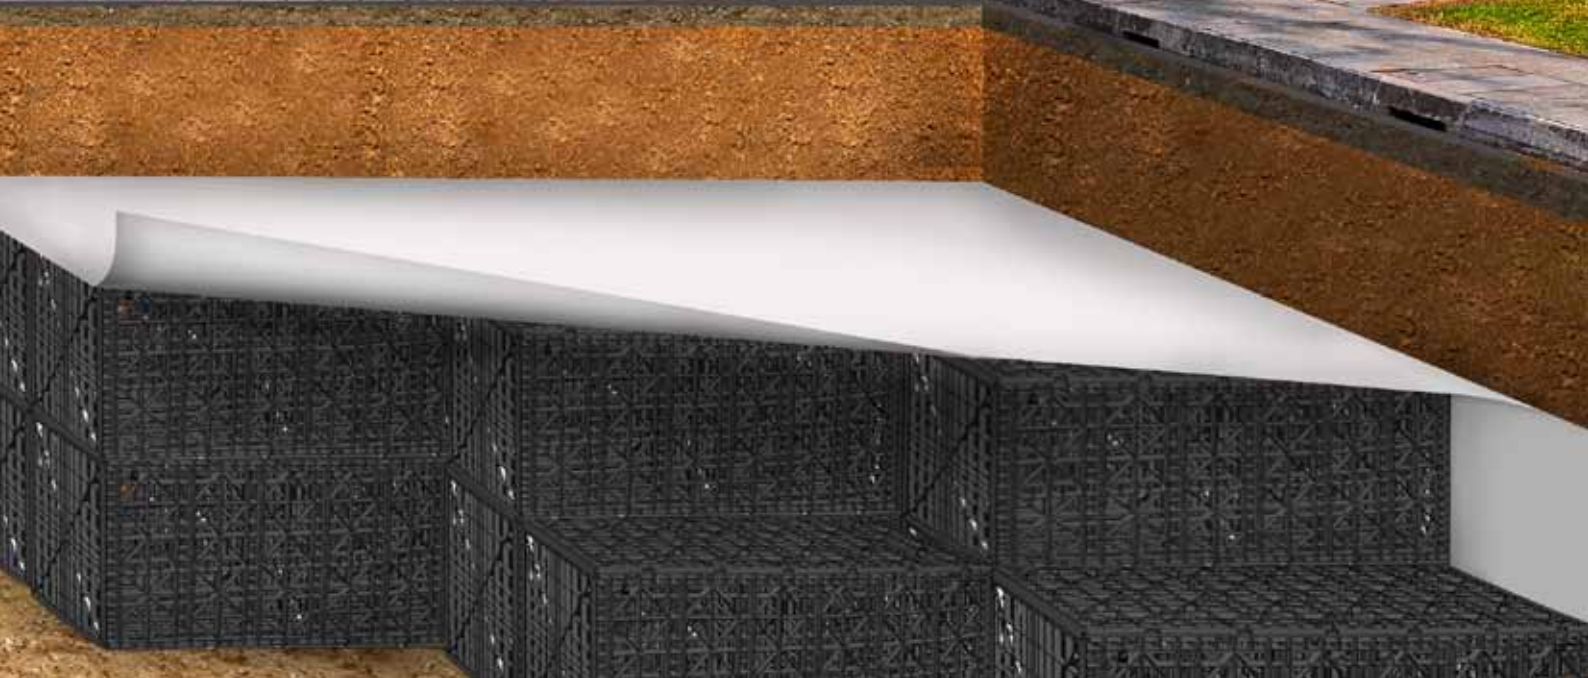

VersiTank[®] 844 sub-surface water infiltration storage tank provides efficient, cost effective and ecologically sustainable solution for stormwater control and management. The system restores on-site natural water filtration, controls release of surface run-off, and also enables harvesting of water on-site for reuse.

VersiTank[®] 844 is easy to install and may be stacked in layers to accommodate specific installation requirements.

Advantages

- High compressive strength allows use under trafficable areas
- Small panel apertures minimise risk of rupturing geotextile during backfill
- Only 2 component panel parts for assembly of tanks
- Load bearing is variable according to number of stabilizers used
- Joiners secure adjoining tanks to form expandable stable units
- Easy on-site assembly

Applicable Areas

- Green parks
- Sport fields
- Swales
- Home gardens
- Green open spaces
- Rain gardens

Technical Data

Material:	Recycled Polypropylene
Dimensions:	782 mm (length), 390 mm (width), 410 mm (height)
Volume:	~0.125 m ³
Surface Area:	1.52 m ²
Surface Void:	≤ 38 %
Internal Void:	≤ 93 %
Colour:	Black
Biological/Chemical Resistance:	Unaffected by moulds and algae. Good resistance to alkali and bitumen.

VersiTank® Project References



IKEA @ Doha Festival City, Qatar



Greenwood Sanctuary, Singapore



Private Residence @ Ewart Park, Singapore

Distributed by:



Trisigma
Inti Solusi,pt.
Landscape & Architectural Products

Gandaria 8 Office Tower, 15th Floor Suite 15B
Jl. Sultan Iskandar Muda, Jakarta 12240
Indonesia
Tel. +62 21 2930 3699
Fax. +62 21 2930 3728
E-mail : info@trisigma.co.id
Website : www.trisigma.co.id

Distributed by:



ELMICH PTE LTD www.elmich.com

Singapore: (+65) 6356 2800

info@elmich.com

Singapore | Seattle | Sydney | Zurich | Guangzhou | Shanghai

